


POWER

- A Powerful 23 HP diesel engine – no DPF or regen ever!
- B Optional drive-on, quick attach mid-mower
- C Our heaviest-lifting compact ever
- D Tilt power steering
- E Folding ROPS for garage parking
- F Front loader skid-steer couplers for superfast hookups



ADVANCED

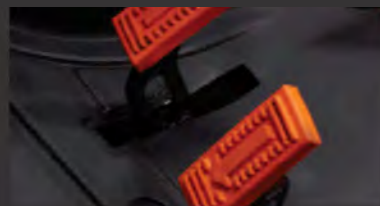

Our hydrostatic drive system (HST) eliminates gear-shifting by safely engaging colour-coded forward or reverse pedals. Combining HST with super-smooth joystick control makes front loader work fast and efficient.



On cab models, the electronic rear hitch controls improve chore efficiency and overall productivity. Easily adjust lift speed, draft, depth, auto-raise on turns, and more.

mahindra TRACTORS



No. 1 Tractor Company in the World*

MAHINDRA TRACTORS
TOUGH ENOUGH

For more information contact Mahindra Tractors on:
Southdowns Ridge Office Park
Block A, 1st Floor
CNR John Vorster and Nellmapius Dr
Southdowns Centurion
Contact : 012 661 3161



mahindra
COMPACT

2123 OJA RANGE

COMPACT CLASS

23 HP
ENGINE

4
WHEEL DRIVE

800 KG
LIFT CAPACITY

22 L
FUEL TANK

5 YEARS
LIMITED
POWERTRAIN
WARRANTY



OEM TECHNICAL SPECIFICATION SHEET

2123 HST | REVISED

Dimensions

Parameter	2123 HST
Overall Length	112.7 ±1 in (2863 ±25 mm)
Overall Width	54.5 ±1 in (1383 ±25 mm)
Overall Height	101.7 ±1 in (2584 ±25 mm)
Wheelbase	61.4 ±0.4 in (1560 ±10 mm)
Min Ground Clearance	13.4 ±0.4 in (340 ±10 mm)

Engine

Parameter	2123 HST
Model	MVS3L2-Z562MM
Type	3-Cyl, 1318cc IDI Diesel
Rated Power	23 HP
Max Torque	78 Nm
Torque @ Rated Speed	67 Nm @ 2500 rpm
Compression Ratio	22:1
Rated Speed	2500 rpm

Weights & Axle Loads

Parameter	2123 HST
Operating Weight	1015 k
Max Gross Vehicle Weight	1015 kg
Max Rear Axle Load	601 kg
Max Front Axle Load	414 kg

Electrical System

Parameter	2123 HST
Battery	53Ah, 12V, CCA 650
Starter	1.6 kW Gear Reduction
Alternator	55A, 12V Regulated
Instrumentation	RPM, Fuel, Temp + LCD/LED Indicators

Transmission & PTO

Parameter	2123 HST
Transmission	3-Range HST, 4WD
PTO Type	Independent PTO 2++ Wet Type
PTO Power	17 HP (12.5 kW)
Rear PTO Speed	562 rpm
Mid PTO Speed	2500 rpm

Tyres

Front (Standard) 4WD	Rear (Standard) 4WD	TYPE
23X8.50-14 CEAT IND	12.4-16 CEAT IND	INDUSTRIAL
24X8.50-14 CEAT TURF	13.6-16 CEAT TURF	TURF
7-12 CEAT AG	12.4-16 CEAT AG	AG

Hydraulic System

Parameter	2123 HST
Type	Open Center, Live
Lift Capacity	800 kg
Relief Pressure	157-163 bar
Hydraulic Flow	23.75 lpm
Steering Flow	19 lpm
3-Point Linkage	SAE Category I

Brakes & Axle

Parameter	2123 HST
Brake Type	Oil Immersed (OIB)
Disc Diameter	123 mm
Front Axle	Mahindra 4WD Axle
Front Flange Distance	812 mm
Rear Flange Distance	900 mm

Fluid Capacities

Parameter	2123 HST
Fuel Tank	22 L
Cooling System	6.76 L
Engine Oil	4.3 L
Transmission	22.5 L
Front Axle	3.5 L

PEACE OF MIND ASSURANCE*




TOUGH ENOUGH.

POWER

- A** Powerful 23 HP diesel engine – no DPF or regen ever!
- B** Optional drive-on, quick attach mid-mower
- C** Our heaviest-lifting compact ever
- D** Tilt power steering
- E** Folding ROPS for garage parking
- F** Front loader skid-steer couplers for superfast hookups



ADVANCED

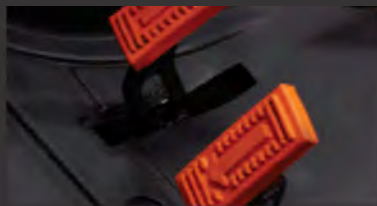

Our hydrostatic drive system (HST) eliminates gear-shifting by safely engaging colour-coded forward or reverse pedals. Combining HST with super-smooth joystick control makes front loader work fast and efficient.



On cab models, the electronic rear hitch controls improve chore efficiency and overall productivity. Easily adjust lift speed, draft, depth, auto-raise on turns, and more.

mahindra TRACTORS



No. 1 Tractor Company in the World*

MAHINDRA TRACTORS
TOUGH ENOUGH

For more information contact Mahindra Tractors on:
Southdowns Ridge Office Park
Block A, 1st Floor
CNR John Vorster and Nellmapius Dr
Southdowns Centurion
Contact : 012 661 3161



mahindra
COMPACT

2126 OJA RANGE

COMPACT CLASS

26 HP
ENGINE

4
WHEEL DRIVE

800 KG
LIFT CAPACITY

22 L
FUEL TANK

5 YEARS
LIMITED
POWERTRAIN
WARRANTY



OEM TECHNICAL SPECIFICATION SHEET

2126 HST | REVISED

Dimensions

Parameter	2126 HST
Overall Length	112.7 ±1 in (2863 ±25 mm)
Overall Width	54.5 ±1 in (1383 ±25 mm)
Overall Height	101.7 ±1 in (2584 ±25 mm)
Wheelbase	61.4 ±0.4 in (1560 ±10 mm)
Min Ground Clearance	13.4 ±0.4 in (340 ±10 mm)

Engine

Parameter	2126 HST
Model	MVS3L2-Z561MM
Type	3-Cyl, 1318cc IDI Diesel
Rated Power	26 HP
Max Torque	80 Nm
Torque @ Rated Speed	70 Nm @ 2500 rpm
Compression Ratio	22:1
Rated Speed	2500 rpm

Weights & Axle Loads

Parameter	2126 HST
Operating Weight	1015 kg
Max Gross Vehicle Weight	1015 kg
Max Rear Axle Load	601 kg
Max Front Axle Load	414 kg

Electrical System

Parameter	2126 HST
Battery	53Ah, 12V, CCA 650
Starter	1.6 kW Gear Reduction
Alternator	55A, 12V Regulated
Instrumentation	RPM, Fuel, Temp + LCD/LED Indicators

Transmission & PTO

Parameter	2126 HST
Transmission	3-Range HST, 4WD
PTO Type	Independent PTO + Wet Clutch
PTO Power	19 HP
Rear PTO Speed	562 rpm
Mid PTO Speed	2500 rpm

Tyres

Front (Standard) 4WD	Rear (Standard) 4WD	TYPE
23X8.50-14 CEAT IND	12.4-16 CEAT IND	INDUSTRIAL
24X8.50-14 CEAT TURF	13.6-16 CEAT TURF	TURF
7-12 CEAT AG	12.4-16 CEAT AG	AG

Hydraulic System

Parameter	2126 HST
Type	Open Center, Live
Lift Capacity	800 kg
Relief Pressure	157-163 bar
Hydraulic Flow	23.75 lpm
Steering Flow	19 lpm
3-Point Linkage	SAE Category I

Brakes & Axle

Parameter	2126 HST
Brake Type	Oil Immersed (OIB)
Disc Diameter	123 mm
Front Axle	Mahindra 4WD Axle
Front Flange Distance	812 mm
Rear Flange Distance	900 mm

Fluid Capacities

Parameter	2126 HST
Fuel Tank	22 L
Cooling System	6.76 L
Engine Oil	4.3 L
Transmission	22.5 L
Front Axle	3.5 L

PEACE OF MIND ASSURANCE*



TOUGH ENOUGH.