

JHB : 081 339 5681

ROSEBANK: 078 278 4007

CPT : 065 147 6680

DBN: 062 163 1618

ZIM: +263 77 2874939

WWW.WORLDOFSUNANDWINDPOWER.COM

WORLD OF
SUN & WIND POWER
(WORLD OF SUNPOWER)

We have got our own engineering team Please
contact us for installation

- 1.We do site viewing
- 2.Design your Solar system
- 3.Installation
- 4.Inpection
- 5.Commissioning

Or if you have your own installation team we
can do inspecting commissioning and provide
support

100KW SYSTEM

2X DEYE 50KW INVERTER

20X DEYE HIGH VOLTAGE 5.1KWH

180X 550W JA SOLAR PANEL

2X DEYE H/V 3U BATTERY RACK

2X DEYE HVB750V/100AH H/V CONTROL BOX



R969,790
INC VAT

SHAFI@WORLDOFSUNPOWER.COM

Three Phase Hybrid Inverter

SUN-29.9/30/35K-SG01HP3-EU-BM3

SUN-40/50K-SG01HP3-EU-BM4



Deye



Stock Code: 605117SH

- 100** 100% unbalanced output, each phase
-  AC couple to retrofit existing solar system
- 10** Max. 10 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel
- 100** Max. charging/discharging current of 100A
- H** High voltage battery, higher efficiency
- 6** 6 time periods for battery charging/discharging
-  Support storing energy from diesel generator

Model	SUN-29.9K-SG01HP3 -EU-BM3	SUN-30K-SG01HP3 -EU-BM3	SUN-35K-SG01HP3 -EU-BM3	SUN-40K-SG01HP3 -EU-BM4	SUN-50K-SG01HP3 -EU-BM4
Battery Input Data					
Battery Type	Lithium-Ion				
Battery Voltage Range (V)	160-800				
Max. Charging Current (A)	50+50				
Max. Discharging Current (A)	50+50				
Charging Strategy for Li-Ion Battery	Self-adaption to BMS				
Number of Battery Input	2				
PV String Input Data					
Max. PV Input Power (W)	38870	39000	45500	52000	65000
Max. PV Input Voltage (V)	1000				
Start-up Voltage (V)	180				
MPPT Voltage Range (V)	150-850				
Rated PV Input Voltage (V)	600				
Max. Operating PV Input Current (A)	36+36+36			36+36+36+36	
Max. Input Short-Circuit Current (A)	55+55+55			55+55+55+55	
No. of MPP Trackers/ No. of Strings per MPP Tracker	3/2+2+2			4/2+2+2+2	
AC Input/Output Data					
Rated AC Input/Output Active Power (W)	29900	30000	35000	40000	50000
Max. AC Input/Output Apparent Power (VA)	29900	33000	38500	44000	55000
Rated AC Input/Output Current (A)	45.4/43.4	45.5/43.5	53.1/50.8	60.7/58	75.8/72.5
Max. AC Input/Output Current (A)	45.4/43.4	50/47.9	58.4/55.8	66.7/63.8	83.4/79.8
Max. Continuous AC Passthrough (grid to load) (A)	200				
Peak Power (off-grid) (W)	1.5 times of rated power, 10s				
Power Factor Adjustment Range	0.8 leading to 0.8 lagging				
Rated Input/Output Voltage/Range (V)	220/380V, 230/400V 0.85Un-1.1Un				
Rated Input/Output Grid Frequency/Range (Hz)	50/45-55, 60/55-65				
Grid Connection Form	3L+N+PE				
Total Current Harmonic Distortion THDi	<3% (of nominal power)				
DC Injection Current	<0.5% In				
Efficiency					
Max. Efficiency	97.60%				
Euro Efficiency	97.0%				
MPPT Efficiency	>99%				
Equipment Protection					
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level				
Surge Protection Level	TYPE II(DC), TYPE II(AC)				
Interface					
Communication Interface	RS485/RS232/CAN				
Monitor Mode	GPRS/WIFI/Bluetooth/4G/LAN(optional)				
General Data					
Operating Temperature Range (°C)	-40 to +60°C, >45°C Derating				
Permissible Ambient Humidity	0-100%				
Permissible Altitude	2000m				
Noise (dB)	≤65				
Ingress Protection(IP) Rating	IP 65				
Inverter Topology	Non-Isolated				
Over Voltage Category	OVC II(DC), OVC III(AC)				
Cabinet Size (WxHxD mm)	527×894×294 (Excluding Connectors and Brackets)				
Weight (kg)	80				
Type of Cooling	Intelligent Air Cooling				
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy				
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105				
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				

System Components

www.deyeess.com

Model	Description	
EPWR Cable5.0(Optional)	Standard 5-meter cable connected to external 12VDC power supply	
		
ECOM Cable5.0(Optional)	Standard 5-meter communication cable connected to the external device	
		
3U-HRACK(Optional)	Standard 19inch rack, caninstall 12 pcs batteries and 1 pcs High Voltage Battery cluster control box	
Dimension (W/D/H) Weight Approximate	589*590*2240mm 85kg	
3U-LRACK(Optional)	Standard 19inch rack, caninstall 8 pcs batteries and 1 pcs High Voltage Battery cluster control box	
Dimension (W/D/H) Weight Approximate	589*590*1640mm 65kg	




NINGBO DEYE ESS TECHNOLOGY CO., LTD
NO. 18TH ZHENGLONG ROAD LONGHSAN CIXI NINGBO ZHEJIAING 315311 P.R.CHINA
Tel: +86-0574-8622 9263 | E-mail: sales@deye.com.cn

Model		BOS-G		
Main Parameter				
Cell Chemistry		LiFePO4		
Module Energy(kWh)		5.12		
Module Nominal Voltage(V)		51.2		
Module Capacity(Ah)		100		
Battery Module Qty In series. (Optional)		3 (Min)	8 (Standard US Cluster)	12 (Standard EU Cluster)
System Nominal Voltage (V)		153.6	409.6	614.4
System Operating Voltage (V)		124.8~175.2	332.8~467.2	499.2~700
System Energy (kWh)		15.36	40.96	61.44
System Usable Energy (k-Wh) ¹		13.8	36.86	55.29
Charge/Discharge ² Current (A)	Recommend	50		
	Nominal	100		
	Peak Discharge (2 mins, 25°C)	125		
Working Temperature(°C)		Charge: 0~55/Discharge:-20~55		
Status Indicator		Yellow: Battery High Voltage Power On Red: Battery System Alarm		
Communication Port		CAN2.0/RS485		
Humidity		5~85%RH		
Altitude		≤2000m		
IP Rating of Enclosure		IP20		
Dimension (W/D/H,mm)		589*590*1640		589*590*2240
Weight Approximate (kg)		258	434	628
Installation Location		Rack Mounting		
Storage Temperature(°C)		0~35		
Recommend Depth of Discharge		90%		
Cycle Life		25±2°C, 0.5C/0.5C,EOL70%≥6000		
Warranty ³		10years		
Certification		CE/IEC62619/UL1973/UL9540A/UN38.3		


1 DC Usable Energy, test conditions: 90% DOD, 0.2C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.

2 The current is affected by temperature and SOC.

3 The warranty is due whichever reached first of warranty period or life cycle power.

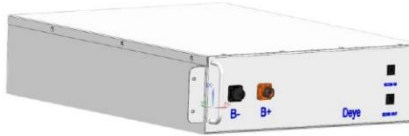Model	Description	
HVB750V/100A-EU	High Voltage Battery cluster control box conforming to European or British Standards	
Operating Voltage	120 ~ 750Vdc	
Nominal Charge/Discharge Current	100A	
Max.Charge/Discharge Current	125A	
DC Input Rating	12±2%/4.15A	
Operating Temperature Range	-20~65°C	
Ingress Protection	IP20	
Dimension (W/D/H)	440*570*150mm	
Weight Approximate	15.5kg	
HVB750V/100A-US	High Voltage Battery cluster control box conforming to North American Standard	
Operating Voltage	120 ~ 750Vdc	
Nominal Charge/Discharge Current	100A	
Max.Charge/Discharge Current	125A	
DC Input Rating	12±2%/4.15A	
Operating Temperature Range	-20~65°C	
Ingress Protection	IP20	
Dimension (W/D/H)	440*570*150mm	
Weight Approximate	17kg	
High voltage box Standard configuration:		
① 120 ohm terminal resistance		
② 140mm communication cable		
③ 220mm power cable		
④ 1.5m power cable (US Version)		
⑤ 2.1m power cable (EU Version)		
⑥ Power plug		
BOS-GM5.1	5.12 kwh battery module	
Battery Type	LiFePO4(LFP)	
Nominal Voltage	51.2Vdc	
Rated Capacity	100Ah	
Rated Energy	5.12kWh	
Nominal Charge/Discharge Current	100A	
Peak.Discharge Current	125A	
Charge Temperature	0~55°C	
Discharge Temperature	-20°C ~ 55°C	
Storage Temperature	0°C ~ 35°C	
Ingress Protection	IP20	
Dimension (W/D/H)	440*570*133mm	
Weight Approximate	44kg	
Battery module Standard configuration:		
① 110mm communication cable		
② 200mm power cable		
EPcable5.0(Optional)	Standard 5-meter power cable connected to the positive pole of the external PCS	
1000V/4AWG cable		
ENCable5.0(Optional)	Standard 5-meter power cable connected to the negative pole of the external PCS	
1000V/4AWG cable		

BOS-G

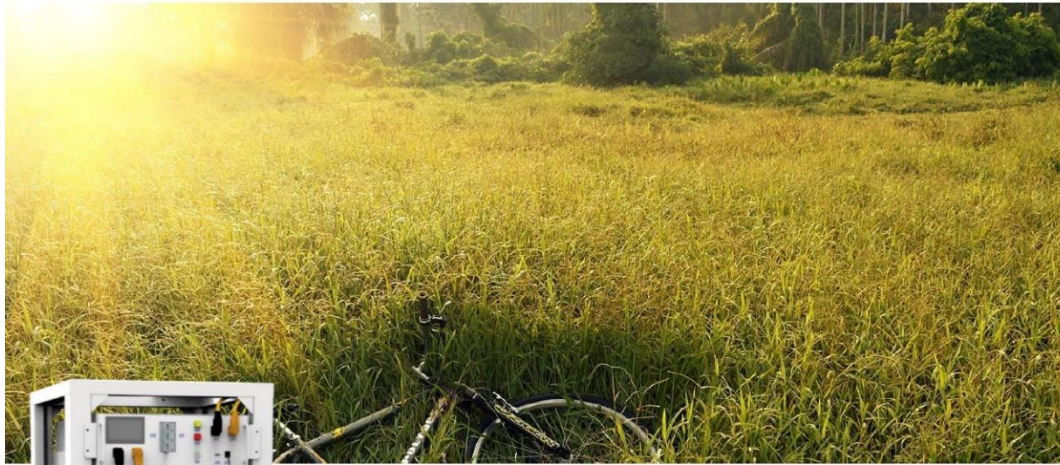

Deye

- ◆ **Convenient**

Quick installation standard of 19-inch embedded designed module is comfortable for installation and maintenance.

- ◆ **Safe and reliable**

Cathode material is made from LFePO4 with safety performance and long cycle life, The module has less self-discharge, up to 6 months without charging it on shelf, no memory effect, excellent performance of shallow charge and discharge.

- ◆ **Intelligent BMS**

It has protection functions including over-discharge, over-charge, over-current and over-high or low temperature. The system can automatically manage charge and discharge state and balance current and voltage of each cell.

- ◆ **Eco-friendly**

The whole module is non-toxic, non-polluting and environmentally friendly.

- ◆ **Flexible configuration**

Multiple battery modules can be in parallel for expanding capacity and power. Support USB upgrade, wifi upgrade(optional), remote up grade(Compatible with Deye inverter).

- ◆ **Wide temperature**

Working temperature range is from -20°C to 55°C, with excellent discharge performance and cycle life.

Harvest the Sunshine

DEEP BLUE 3.0

Mono

550W MBB Half-cell Module
JAM72S30 525-550/MR/1500V Series

Introduction

Assembled with 118B PERC cells, the half-cell configuration of the modules offers the advantages of higher power output, better temperature-dependent performance, reduced shading effect on the energy generation, lower risk of hot spot, as well as enhanced tolerance for mechanical loading.



Higher output power



Lower LCOE



Less shading and lower resistive loss




Better mechanical loading tolerance

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

0.55% Annual Degradation
Over 25 years

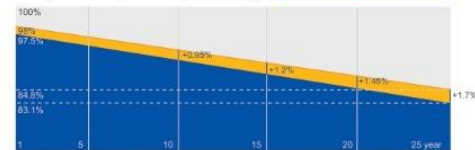

■ New linear power warranty ■ Standard module linear power warranty

Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems




JA SOLAR

www.jasolar.com

Specifications subject to technical changes and tests.
JA Solar reserves the right of final interpretation.
Shanghai JA Solar Technology Co., Ltd.



MECHANICAL DIAGRAMS

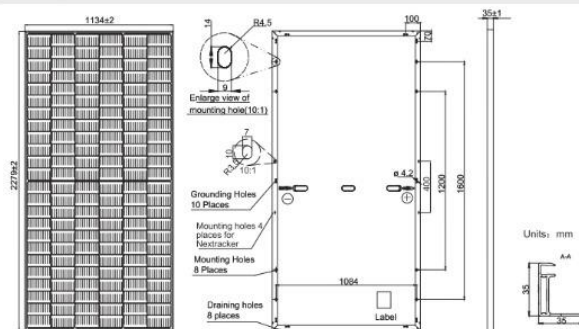

Remark: customized frame color and cable length available upon request

SPECIFICATIONS

Cell	Mono
Weight	28.6kg±3%
Dimensions	2279±2mm×1134±2mm×35±1mm
Cable Cross Section Size	4mm ² (IEC) . 12 AWG(UL)
No. of cells	144(6×24)
Junction Box	IP68, 3 diodes
Connector	Genuine MC4-EVO2 QC 4 10-35/45
Cable Length (Including Connector)	Portrait: 300mm(+)/400mm(-); Landscape: 1300mm(+)/1300mm(-)
Country of Manufacturer	China/Vietnam

ELECTRICAL PARAMETERS AT STC

TYPE	JAM72S30 -525/MR/1500V	JAM72S30 -530/MR/1500V	JAM72S30 -535/MR/1500V	JAM72S30 -540/MR/1500V	JAM72S30 -545/MR/1500V	JAM72S30 -550/MR/1500V
Rated Maximum Power(P _{max}) [W]	525	530	535	540	545	550
Open Circuit Voltage(V _{oc}) [V]	49.15	49.30	49.45	49.60	49.75	49.90
Maximum Power Voltage(V _{mp}) [V]	41.15	41.31	41.47	41.64	41.80	41.96
Short Circuit Current(I _{sc}) [A]	13.65	13.72	13.79	13.86	13.93	14.00
Maximum Power Current(I _{mp}) [A]	12.76	12.83	12.90	12.97	13.04	13.11
Module Efficiency [%]	20.3	20.5	20.7	20.9	21.1	21.3
Power Tolerance	0→+5W					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.045%/°C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.275%/°C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.350%/°C					

STC Irradiance 1000W/m², cell temperature 25°C, AM1.5G

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.
Measurement tolerance at STC: P_{max} ±3 %, V_{oc} ±3% and I_{sc} ±4%.

ELECTRICAL PARAMETERS AT NOCT

TYPE	JAM72S30-525 /MR/1500V	JAM72S30-530 /MR/1500V	JAM72S30-535 /MR/1500V	JAM72S30-540 /MR/1500V	JAM72S30-545 /MR/1500V	JAM72S30-550 /MR/1500V
Rated Max Power(P _{max}) [W]	397	401	405	408	412	416
Open Circuit Voltage(V _{oc}) [V]	46.05	46.18	46.31	46.43	46.55	46.68
Max Power Voltage(V _{mp}) [V]	38.36	38.57	38.78	38.99	39.20	39.43
Short Circuit Current(I _{sc}) [A]	10.97	11.01	11.05	11.09	11.13	11.17
Max Power Current(I _{mp}) [A]	10.35	10.39	10.43	10.47	10.51	10.55

NOCT Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G


*For NexTracker installations, Maximum Static Load, Front is 2000Pa while Maximum Static Load, Back is 2000Pa.

OPERATING CONDITIONS


Maximum System Voltage	1500V DC (IEC)
Operating Temperature	-40 °C → +85 °C
Maximum Series Fuse Rating	25A
Maximum Static Load, Front*	3600Pa, 1.5
Maximum Static Load, Back*	1600Pa, 1.5
NOCT	45±2 °C
Safety Class	Class II
Fire Performance	UL Type 1

CHARACTERISTICS

Current-Voltage Curve JAM72S30-540/MR/1500V



Power-Voltage Curve JAM72S30-540/MR/1500V



Current-Voltage Curve JAM72S30-540/MR/1500V

