



Engine	Cummins 6LTAA9.3
Rated Power	162 kW (217 hp / 220 ps) @ 2,200 rpm
Net Power	152 kW (204 hp / 207 ps) @ 2,200 rpm
Operating Weight	17,900 kg
Standard Bucket Size	3.5 m ³
Standard Breakout Force	180.7 kN
Standard Dump Clearance	2,978 mm

856H MAX WHEEL LOADER

TOUGH WORLD. TOUGH EQUIPMENT.

856H MAX SPECIFICATIONS >>>

ENGINE

Emission Regulation	Tier 2 / Stage II
Make	Cummins
Model	6LTA A9.3
Rated Power	162 kW (217 hp / 220 ps) @ 2,200 rpm
Net Power	152 kW (204 hp / 207 ps) @ 2,200 rpm
Peak Torque	940 N·m @ 1,400 - 1,600 rpm
Displacement	9.3 L
Number of Cylinder	6
Aspiration	Turbocharged & Air-to-air intercooled

TRANSMISSION

Transmission Type	Electric proportional, power shift
Torque Converter	Single stage, three elements
Maximum Travel Speed, fwd	37 km/h
Maximum Travel Speed, rev	24 km/h
Number of Speed, fwd	4
Number of Speed, Rev	3

AXLES

Differential Front Type	Limited slip
Differential Rear Type	Limited slip
Axle Oscillation	± 10°

STEERING


Steering Configuration	Articulated
Steering Relief Pressure	20.7 MPa

BRAKES

Service Brake Type	Wet discs brake
Service Brake Actuation	Hydraulic
Parking Brake Type	Drum
Parking Brake Actuation	Electro-hydraulic release

HYDRAULIC SYSTEM

Main Pump Type	Gear
Main Relief Pressure	25 MPa
Raise	5.3 s
Dump Time	1.5 s
Float Down Time	3.0 s
Fastest Total Cycle Time	9.8 s

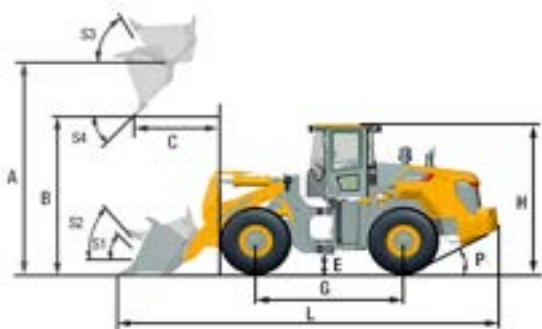

LOADER ARM PERFORMANCE with Standard Bucket 3.5 m³

Tipping Load - Straight (ISO 14397-1:2007)	13,860 kg
Tipping Load - Full Turn (ISO 14397-1:2007)	12,140 kg
Bucket Breakout Force	180.7 kN
A Maximum Hinge Pin Height	4,156 mm
B Dump Clearance at Full Height Discharge	2,978 mm
C Dump Reach at Full Height Discharge	1,231 mm
D Maximum Digging Depth, Bucket Level	50 mm
S ₁ Bucket Rollback at Ground Level	44°
S ₂ Bucket Rollback at Carry	49°
S ₃ Bucket Rollback at Maximum Height	62°
S ₄ Maximum Dump Angle at Full Height	45°

BUCKET PERFORMANCE

Reference Bucket	2.7 - 5.6 m³
------------------	--------------

DIMENSIONS

E Ground Clearance	431 mm
G Wheelbase	3,370 mm
H Cab Height	3,500 mm
J Wheel Tread	2,150 mm
K Width Over Tires	2,750 mm
L Length with Bucket Down	8,390 mm
M Turn Angle, Either Side	38°
P Rear Angle of Departure	28°
R ₁ Turning Radius, Bucket Carry	6,986 mm
R ₂ Turning Radius, Outside of Tire	6,308 mm
W Width Over Bucket	2,970 mm

TIRES


Tire Size	23.5-25 PR20 L-3 TT
-----------	---------------------

OPERATING WEIGHTS

Operating Weight	17,900 kg
------------------	-----------

SERVICE CAPACITY

Fuel Tank	300 L
Engine Oil	26 L
Cooling System	42 L
Hydraulic System	240 L
Transmission and Torque Converter	35 L
Axles, Front/Rear	40 L / 42 L

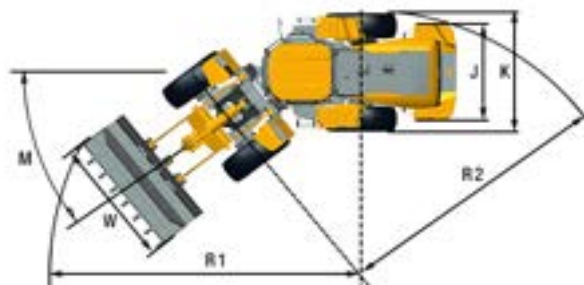

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China

T: +86 772 3886124

E: overseas@liugong.com

www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

03/2023 Designed by LiuGong
Replace the previous versions of 02/2022