



ROTARY PRE-CLEANERS


HIGH-CAPACITY SEED
PRE-CLEANING



ROTARY PRE-CLEANERS

Elica Rotary pre-cleaners are intended for performing pre-cleaning before loading grains into the silos and before seed processing installations to protect the following machines. The product enters by way of gravity into a rotating, cylindrical drum. The drum is equipped with sieves which can be change depending on the cleaning requirements. The clean product passes through the screen perforations and the large impurities are discharged at the end of the drum. The maximum separation of impurities is 2%.


MGP WITH ASPIRATION MODULE

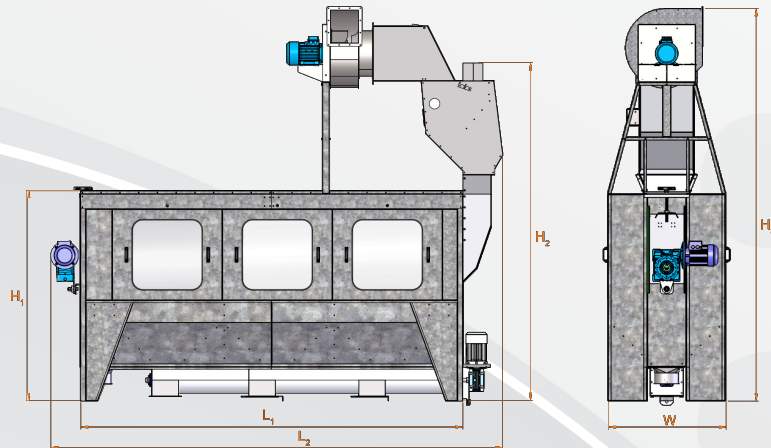

Dimensions (mm)	Model							
	MGP 95/2 OPEN	MGP 95/2 IN	MGP 95/3 OPEN	MGP 95/3 IN	MGP 95/4 OPEN	MGP 95/4 IN	MGP 126/4 OPEN	MGP 126/4 IN
W1	1080		1080		1080		1400	1400
W2	1080	1467	1080	1467	1080	1467	2130	1995
L1	2500		3507		4535		4635	4635
L2	3143	3374	4147	4378	5178	5409	5440	5631
H1	1930		1930		1930		2630	2630
H2	3180	3688	3180	3688	3180	3688	4080	4554
H3	3625	3872	3625	3872	3625	3872	4080	4730
Power consumption (kW)	2.2kW+3kW	2.2kW+3kW* +0.37kW	3kW+3kW	3kW+3kW* +0.37kW	3kW+3kW*	3kW+3kW* +0.37kW	4kW**+0.55kW +5.5kW	4kW**+0.55kW +5.5kW*
Sieve area (m2)	6		9		12		16	
Capacity (m³/h)	Up to 50		Up to 100		Up to 150		Up to 250	Up to 250

* Electrical motors require a frequency converter
** Electrical motors require a soft starter

MGP WITH CLOSE CIRCUIT ASPIRATION MODULE ABZ

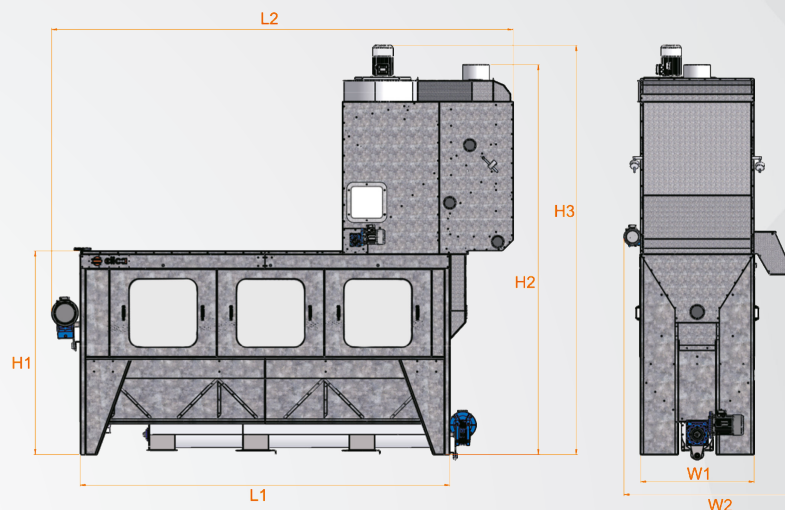

+359 86 820 820 / info@elica-pro.com
www.elica-pro.com

32 HARALAMPI DZHAMDZHEV St / SILISTRA / BULGARIA